



Main

| | |
|-------------------------------|----------------------------------|
| Range of product | Harmony Electromechanical Relays |
| Series name | Interface relay |
| Product or component type | Plug-in relay |
| Device short name | RXG |
| Contacts type and composition | 2 C/O |

Complementary

| | |
|--|---|
| Status LED | With |
| Contacts material | Silver alloy (AgSnO ₂ In ₂ O ₃) |
| Contact resistance | 100 MOhm |
| [I _{th}] conventional enclosed thermal current | 5 A at -40...55 °C |
| [I _e] rated operational current | 5 A at 30 V (DC) conforming to UL 5 A at 30 V (DC) conforming to IEC 5 A at 250 V (AC) conforming to IEC 5 A at 250 V (AC) conforming to UL |
| Maximum switching voltage | 250 V AC 30 V DC |
| Load current | 5 A at 250 V AC |
| Maximum switching capacity | 1250 VA |
| Minimum switching capacity | 50 mW at 10 mA, 5 V DC |
| Operating rate | <= 1800 cycles/hour under load <= 18000 cycles/hour no-load |
| Utilisation coefficient | 20 % |
| Mechanical durability | 10000000 Cycles |
| Electrical durability | 100000 Cycles for NO resistive load at 55 °C 100000 Cycles for NC resistive load at 55 °C |
| [U _i] rated insulation voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL |
| [U _{imp}] rated impulse withstand voltage | 6 KV 1.2/50 μs |
| Dielectric strength | 1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation 3000 V AC between poles with basic insulation |
| Resistance | 23500 Ohm +/- 15 % |
| Insulation resistance | 1000 MOhm at 500 V DC |
| Test levels | Level A group mounting |
| Mounting position | Any position |
| Average consumption | 0.82 VA 60 Hz |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|--------------------------------|----------------------|
| Drop-out voltage threshold | $\geq 0.3 U_c$ AC |
| Control circuit voltage limits | 0.8...1.1 U_c AC |
| Electrical insulation class | Class F |
| Operating time | 20 ms |
| Reset time | 20 Ms |
| [Uc] control circuit voltage | 230 V AC 50/60 Hz |
| Safety reliability data | B10d = 100000 |
| Colour of cover | Standard |
| Control type | Lockable test button |
| Local signalling | Flag |
| Torque value | 0.8 N.M |
| Product weight | 0.02 Kg |
| Device presentation | Complete product |

Environment

| | |
|---------------------------------------|--|
| Vibration resistance | 3 gn, amplitude = +/- 0.75 mm (f = 10...150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10...150 Hz)not in operation |
| IP degree of protection | IP40 |
| Shock resistance | 20 gn in operation 100 gn not in operation |
| Protection category | RT I |
| Standards | CSA C22.2 No 14 UL 508 IEC 61810-1 |
| Product certifications | UL EAC CE CSA DNV-GL |
| Pollution degree | 2 |
| Overvoltage category | III |
| Ambient air temperature for storage | -40...85 °C |
| Ambient air temperature for operation | -40...70 °C |
| Relative humidity | 10...85 % |


Packing Units

| | |
|------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.267 Cm |
| Package 1 Width | 3.06 Cm |
| Package 1 Length | 4.088 Cm |
| Package 1 Weight | 20 G |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Height | 3.5 Cm |
| Package 2 Width | 8.2 Cm |
| Package 2 Length | 9 Cm |
| Package 2 Weight | 229 G |
| Unit Type of Package 3 | S01 |
| Number of Units in Package 3 | 200 |
| Package 3 Height | 15 Cm |
| Package 3 Width | 15 Cm |
| Package 3 Length | 40 Cm |
| Package 3 Weight | 4.76 Kg |


Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |

Dimensions

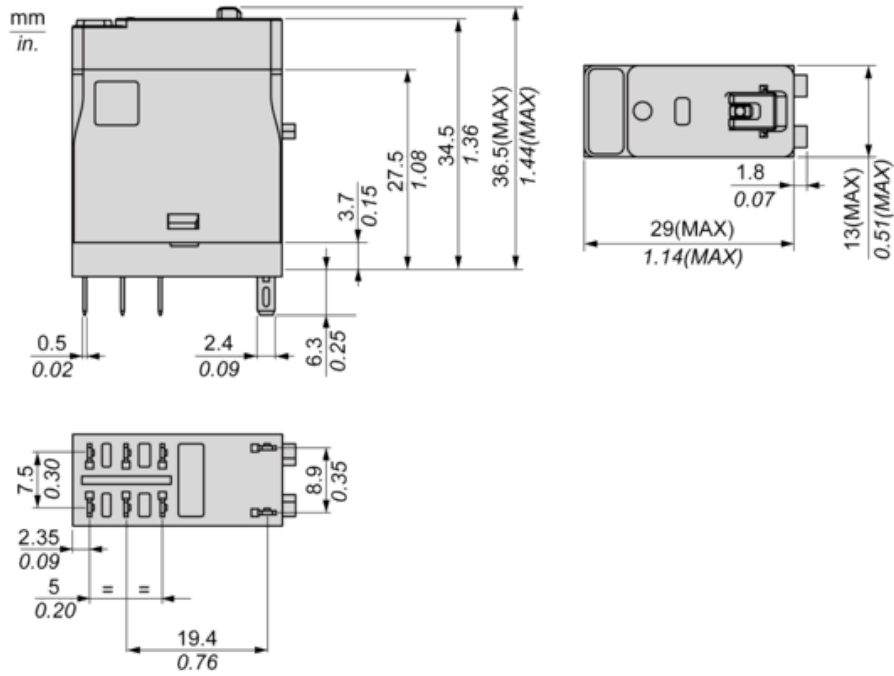


Wiring Diagram

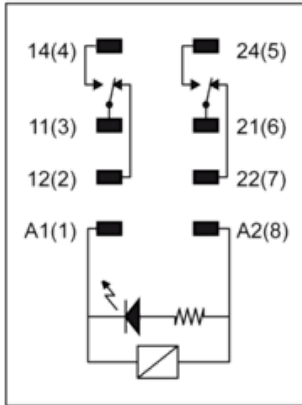

Performance Curves


Maximum Switching Capacity

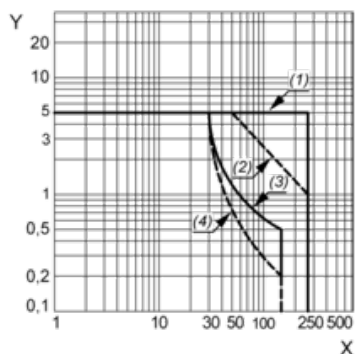

- X : Switching voltage (V)
- Y : Switching current (A)
- (1) AC Resistive Load
- (2) AC Inductive Load $\cos(\phi)=0.4$
- (3) DC Resistive Load
- (4) DC Inductive Load (L/R=7ms)

Life Expectancy


Resistive Load

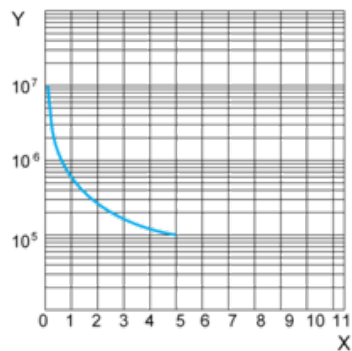

- X : Contact Current (A)
- Y : Operating Cycle Number

Life Expectancy

Inductive Load

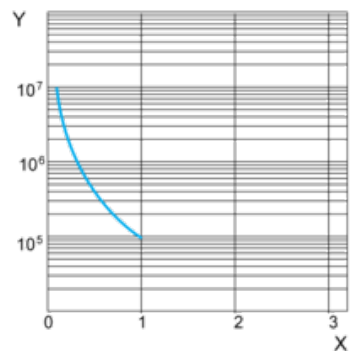


- X : Contact Current (A)
- Y : Operating Cycle Number

NOTE: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range

AC Coil Operating Range VS Ambient Temperature

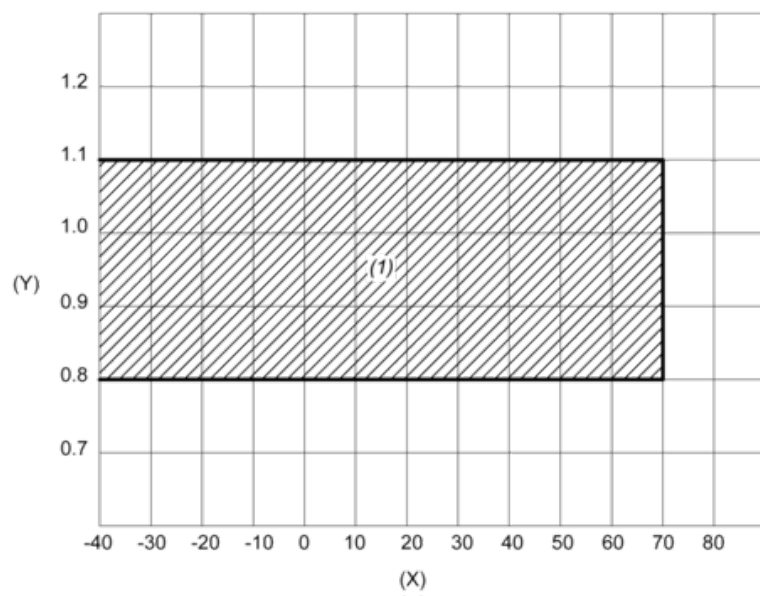

X : Ambient temperature (°C)

Y : Coil voltage (U/Uc)

(1) Permitted operating range area

Product Life Status : **Commercialised**